


## Specifications

- 20 PSI to 125 PSI Water Pressure
- Full Cold to 120°F Operating Temperature
- Anti-Scalding safety feature limits the maximum water temperature to 120°F
- Control Panel sensor detection distance of 0.5"
- Control Panel sensor response time of 0.4 seconds
- 1 Year Limited Warranty



## Features

- Control box with integrated check valves, anti-scalding safety device and motorized mixing valve
- Removable strainers to help prevent clogging
- Two hole installation. Single hole installation with optional deck plate
- Solid brass construction
- 100V ~ 120V AC Adapter and / or battery powered
- 1.5GPM maximum water flow
- Chrome finish with PVD to reduce fading and corrosion

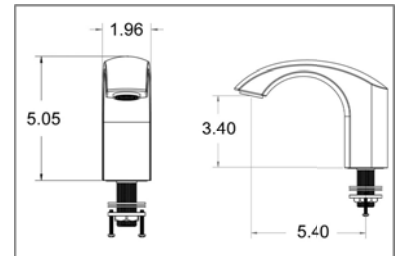

## Certifications


- ADA Compliant • ASME A112.18 • California AB1953
- ANSI/NSF 61-9 • ASSE 1070 • EPA Water Sense

## Equipment Included

- Faucet Body and Control Panel
- Control Box with mounting screws
- Neoperl Aerator
- 24" Braided Water Supply Hose
- AC Adapter and 8 – AA batteries

### OPTIONS:

- Deck Plate for single hole installation

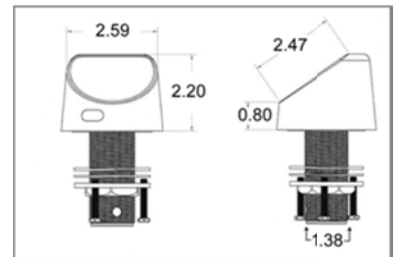

## Touch Free Functions

- Dispenses water automatically
- Continuous water flow – default is 30 seconds. Programmable to 1 Minute, 2 Minutes or 5 Minutes
- Touch-less Water temperature control
- Touch-less Water flow control
- Programmable preset water temperature and water flow settings

